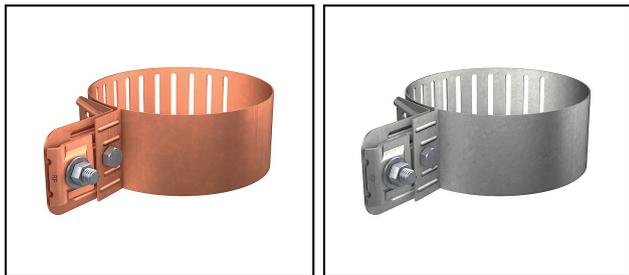


## Ableitungen

■ **AL 3** Kontaktbride verstellbar

Artikel-Nr.	E-Nummer									
285.103.000	156 831 160	H	Cu	6 - 10	M8x30	70 - 120				25
280.101.000	156 831 170	H	InoxA2	6 - 10	M8x30	70 - 120				25
280.102.000	156 831 180	H	InoxA2	6 - 10	M8x30	50 - 100				25

Technische Spezifikationen: **Kontaktbride verstellbar AL 3**

	285.103.000	280.101.000	280.102.000
<b>Geprüft Klasse H / N (EN 62561-1)</b>	H		
<b>Material</b>	Cu	InoxA2	
<b>Drahtdurchmesser</b>	6 - 10 mm		
<b>Schraube</b>	M8x30		
<b>Spannbereich rund</b>	70 - 120 mm	50 - 100 mm	
<b>Oberfläche</b>	unbehandelt		
<b>Anzahl der Leiter</b>	1		
<b>Querschnitt des anzuschliessenden Kabels</b>	25 - 75 mm <sup>2</sup>		
<b>Klemm-/Spannbereich</b>	70 - 120 mm	50 - 100 mm	
<b>Drehmoment</b>	12 N·m		
<b>Kommerzielle Spezifikation</b>			
<b>Zolltarifnummer</b>	85389000		
<b>Ursprungsland</b>	CH		
<b>Logistische Spezifikation</b>			
<b>VPE Gewicht</b>	7.49 kg	5.76 kg	5.062 kg

