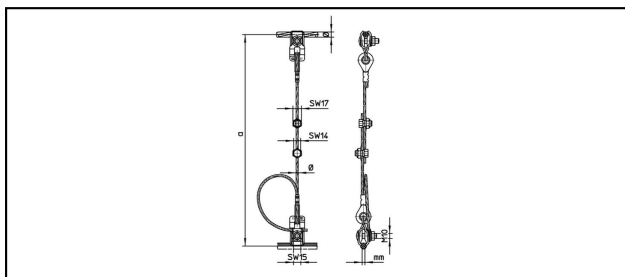


## Seilhänger








## ■ SHTF5,1/10V

**Anwendung**

Für Fahrdrahtaufhängung, nicht stromführend

**Material**

Klemme aus CuNiSi / Inox / Seil Bz 2 / Kausche Kunststoff

| Artikel-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|---|---|---|---|---|---|---|--|--|
| 625.590.201 | 9 - 13  | 50 - 95   | 5.5 - 7   | 4.5   | 10  | 3   | 750 - 2300  |  |  |
| 625.590.203 | 9 - 13  | 50 - 95   | 5.5 - 7   | 4.5   | 10  | 3   | 750 - 2300  |  |  |
| 625.590.204 | 9 - 13  | 50 - 95   | 5.5 - 7   | 4.5   | 10  | 3   | 750 - 2300  |  |  |

Technische Spezifikationen: **SHTF5,1/10V**

|                                   | 625.590.201             | 625.590.203 | 625.590.204 |
|-----------------------------------|-------------------------|-------------|-------------|
| <b>Tragseil Durchmesser</b>       | 9 - 13 mm               |             |             |
| <b>Tragseil Seilfläche</b>        | 50 - 95 mm <sup>2</sup> |             |             |
| <b>Fahrdraht-Kerbe</b>            | 5.5 - 7 mm              |             |             |
| <b>Hängerseil Durchmesser</b>     | 4.5 mm                  |             |             |
| <b>Hängerseil Fläche</b>          | 10 mm <sup>2</sup>      |             |             |
| <b>Ausreisskraft</b>              | 3 kN                    |             |             |
| <b>Länge a</b>                    | 750 - 2300 mm           |             |             |
| <b>Kommerzielle Spezifikation</b> |                         |             |             |
| <b>Zolltarifnummer</b>            | 85359000                |             |             |
| <b>Ursprungsland</b>              | unbestimmt              | CH          |             |

