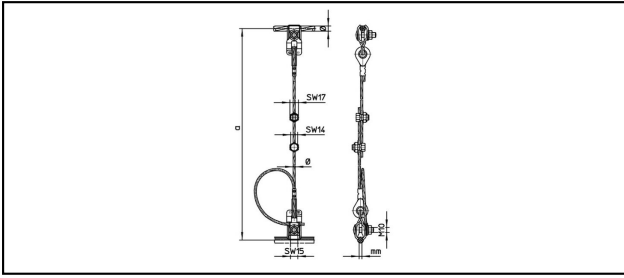


Cable droppers

■ SHTF5,1/10V










Application

Suspension for contact wire, non-current feeding

Material

Clamp CuNiSi / Inox / Cable Bz 2 / Thimble plastics

Article-Nr.									
625.590.201	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		



Technical Specifications: **SHTF5,1/10V**

Article No.	625.590.201
Catenary wire diameter	9 - 13 mm
Catenary wire section	50 - 95 mm ²
Contact wire groove	5.5 - 7 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	3 kN
Length a	750 - 2300 mm
Commercial specification	
Customs number	85359000
country of origin	ZA*

