
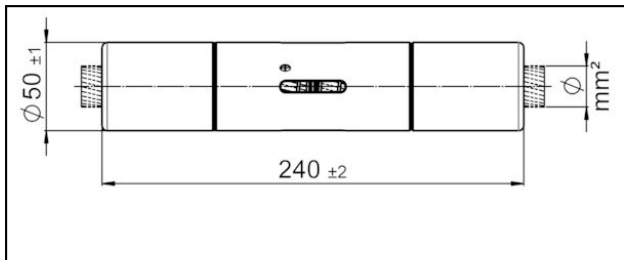


Conical coupler

■ KV240 Cone connector

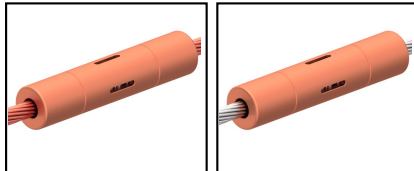

Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics





Service load min. 3 kN / max. 40 kN
Breaking load of corpus min. 170 kN

Material

Corpus CuNiSi / Cone AlBz

Legend

1) Cone AlBz

Article-Nr.									
615.242.325	Cu325	23.4	323.8						2.63

Technical Specifications: **Cone connector KV240**

Article No.	615.242.325
Rail product name	Cu325
Catenary wire diameter	23.4 mm
Catenary wire section	323.8 mm ²
Commercial specification	
Customs number	0
country of origin	undefined
Logistic specification	
Kilo / piece	2.63 kg

