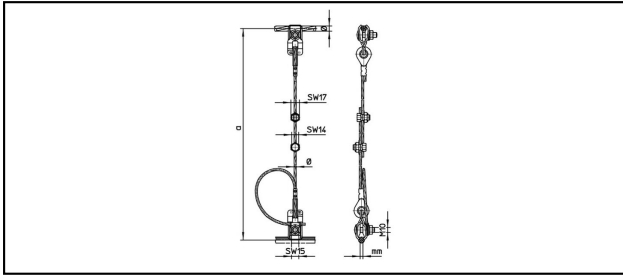


### Cable droppers

■ **SHTF5,1/10V**










**Application**

Suspension for contact wire, non-current feeding

**Material**

Clamp CuNiSi / Inox / Cable Bz 2 / Thimble plastics

Article-Nr.									
625.590.203	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		

Technical Specifications: **SHTF5,1/10V**

Article No.	625.590.203
<b>Catenary wire diameter</b>	9 - 13 mm
<b>Catenary wire section</b>	50 - 95 mm <sup>2</sup>
<b>Contact wire groove</b>	5.5 - 7 mm
<b>Dropper wire diameter</b>	4.5 mm
<b>Dropper wire section</b>	10 mm <sup>2</sup>
<b>Slipping force</b>	3 kN
<b>Length a</b>	750 - 2300 mm
<b>Commercial specification</b>	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH

