
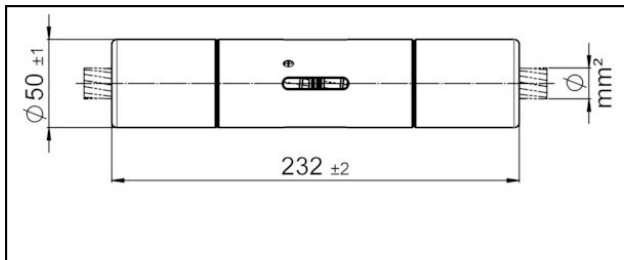


## Conical coupler

### ■ KV232 Cone connector

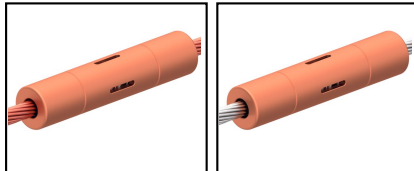

#### Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

#### Characteristics






Service load min. 3 kN / max. 40 kN  
Breaking load of corpus min. 170 kN

#### Material

Corpus CuNiSi

#### Legend

- 1) Cone INOX
- 2) Cone AIBz

Article-Nr.									
615.242.200	PH200	18.5	204.3					2.76	2

Technical Specifications: **Cone connector KV232**

Article No.	615.242.200
<b>Rail product name</b>	PH200
<b>Catenary wire diameter</b>	18.5 mm
<b>Catenary wire section</b>	204.3 mm <sup>2</sup>
<b>comment</b>	2
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Texte	
<b>comment</b>	2
Logistic specification	
<b>Kilo / piece</b>	2.76 kg

