


Accessories

■ **NSL25** Arc catcher

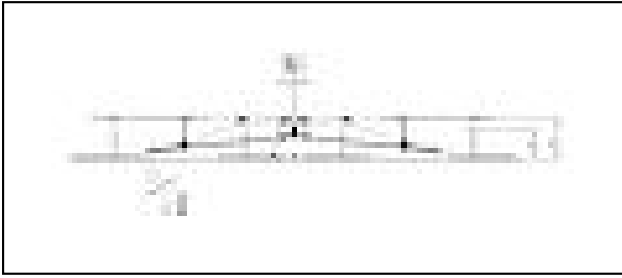

Application

The arc catcher is a mounted device for the Neutral Section / Phase Break NS 25.

Characteristics




The arc catcher is used on Neutral Sections / Phase Breaks in tunnels where a limited system height exists. It is compatible with most cantilevers and catenary systems. It will be delivered with as a complete arc catcher device with all clamping components and messenger wire insulators. Detailed customer related data of the possible site are essential. Minimum system height 370 mm
Maximum system height 620 mm

Material

Stainless steel

Legend

1) Ø cantilever to specify

| Article-Nr. |  | | | | | | |  |  |
|-------------|---|--|--|--|--|--|--|---|---|
| 690.044.000 | 150 - 350 | | | | | | | 16 | 1 |

Technical Specifications: **Arc catcher NSL25**

| | |
|-----------------------------|--------------|
| Article No. | 690.044.000 |
| Arcing horn distance | 150 - 350 mm |
| comment | 1 |
| Commercial specification | |
| Customs number | 85354000 |
| country of origin | CH |
| Texte | |
| comment | 1 |
| Logistic specification | |
| Kilo / piece | 16 kg |

