










## Conductor connections and junctions

### ■ FL 15 Cable connection set

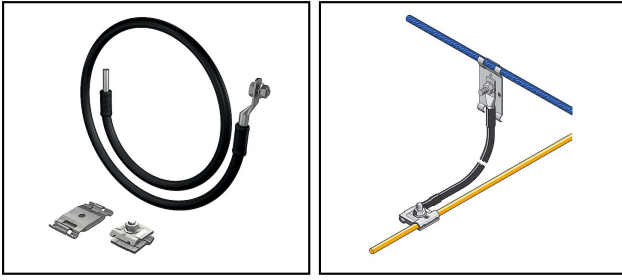

#### Characteristics

Traversable connection from the cable of the rope safety device to the start line of the lightning protection.

Article-Nr.	E-Number								
280.103.010	156 940 500	N	InoxA2	16	6+8	6 - 10	M8	800	5

Technical Specifications: **Cable connection set FL 15**

	280.103.010
<b>Approved class H / N (EN 62561-1)</b>	N
<b>Screw</b>	M8
<b>Material</b>	InoxA2
<b>Nominal cross section conductor</b>	16 mm <sup>2</sup>
<b>Length a</b>	800 mm
<b>Clamping range wire</b>	6+8 mm
<b>Wire diameter</b>	6 - 10 mm
<b>Type of accessory</b>	Anschlusslasche
<b>Surface protection</b>	blank
<b>required torque</b>	12 N·m
Commercial specification	
<b>Customs number</b>	85389000
<b>country of origin</b>	CH
Logistic specification	
<b>VPE Weight</b>	1.894 kg

