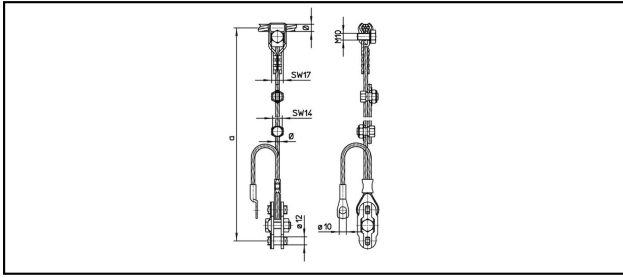


Cable droppers

■ **SHT4/16WS**



Application








Suspension for contact wire, current feeding

Characteristics

Other lengths and contact wire grooves on request

Material

Clamp and interlink CuNiSi / Cable Cu

Article-Nr.									
625.581.000	6.5 - 12.6	25 - 95	1400 - 1800	6	2	16			1.01

Technical Specifications: **SHT4/16WS**

	625.581.000
Catenary wire diameter	6.5 - 12.6 mm
Catenary wire section	25 - 95 mm ²
Length a	1400 - 1800 mm
Dropper wire diameter	6 mm
Slipping force	2 kN
Dropper wire section	16 mm ²
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	1.01 kg

