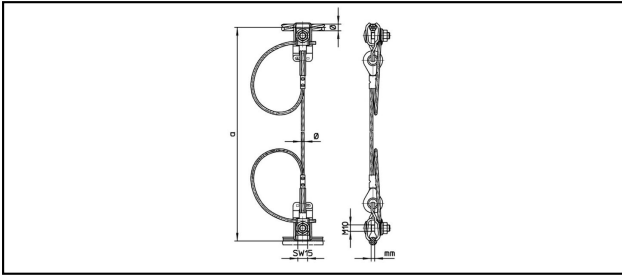


Cable droppers

■ **SHTF5/10**



Application









Suspension for contact wire, current feeding

Characteristics

Other lengths and contact wire grooves on request
Order with 625.591.100 / nominal length

Material

Clamp CuNiSi / Wire Bz 2 / Thimble plastic

Article-Nr.								
625.591.000	9 - 13	50 - 95	5.5 - 7	300 - 2800	4.5	10	3	0.416

Technical Specifications: **SHTF5/10**

	625.591.000
Catenary wire diameter	9 - 13 mm
Catenary wire section	50 - 95 mm ²
Contact wire groove	5.5 - 7 mm
Length a	300 - 2800 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	3 kN
Commercial specification	
Customs number	85359000
country of origin	ZA*
Logistic specification	
Kilo / piece	0.416 kg

