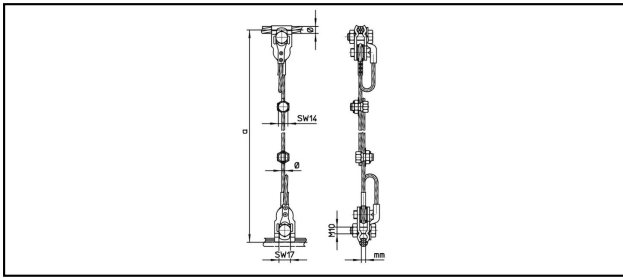


Cable droppers

SHTF1/10V



Application









Suspension for contact wire, current feeding

Characteristics

Other lengths and contact wire grooves on request

Material

Clamp CuNiSi / Wire Bz 2

Article-Nr.									
625.151.593	9 - 12.5	50 - 95	3.75 - 8.5	450 - 650	4.5	10	3		0.476
625.157.599	9 - 12.5	50 - 95	3.75 - 8.5	1650 - 2150	4.5	10	3		0.614
625.167.593	12.5 - 17.5	95 - 185	3.75 - 8.5	450 - 650	4.5	10	3		0.482
625.168.594	12.5 - 17.5	95 - 185	3.75 - 8.5	550 - 850	4.5	10	3		0.502
625.169.595	12.5 - 17.5	95 - 185	3.75 - 8.5	600 - 1000	4.5	10	3		0.515
625.170.596	12.5 - 17.5	95 - 185	3.75 - 8.5	750 - 1250	4.5	10	3		0.539
625.171.597	12.5 - 17.5	95 - 185	3.75 - 8.5	1050 - 1550	4.5	10	3		0.566
625.172.598	12.5 - 17.5	95 - 185	3.75 - 8.5	1350 - 1850	4.5	10	3		0.593
625.152.594	9 - 12.5	50 - 95	3.75 - 8.5	550 - 850	4.5	10	3		0.496
625.153.595	9 - 12.5	50 - 95	3.75 - 8.5	600 - 1000	4.5	10	3		0.509
625.154.596	9 - 12.5	50 - 95	3.75 - 8.5	750 - 1250	4.5	10	3		0.533
625.155.597	9 - 12.5	50 - 95	3.75 - 8.5	1050 - 1550	4.5	10	3		0.56
625.156.598	9 - 12.5	50 - 95	3.75 - 8.5	1350 - 1850	4.5	10	3		0.587
625.158.600	9 - 12.5	50 - 95	3.75 - 8.5	1950 - 2450	4.5	10	3		0.641



Technical Specifications: **SHTF1/10V**

	625.151.593	625.157.599	625.167.593	625.168.594
Length a	450 - 650 mm	1650 - 2150 mm	450 - 650 mm	550 - 850 mm
Catenary wire diameter	9 - 12.5 mm		12.5 - 17.5 mm	
Catenary wire section	50 - 95 mm ²		95 - 185 mm ²	
Contact wire groove	3.75 - 8.5 mm			
Dropper wire diameter	4.5 mm			
Dropper wire section	10 mm ²			
Slipping force	3 kN			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.476 kg	0.614 kg	0.482 kg	0.502 kg

	625.169.595	625.170.596	625.171.597	625.172.598
Length a	600 - 1000 mm	750 - 1250 mm	1050 - 1550 mm	1350 - 1850 mm
Catenary wire diameter	12.5 - 17.5 mm			
Catenary wire section	95 - 185 mm ²			
Contact wire groove	3.75 - 8.5 mm			
Dropper wire diameter	4.5 mm			
Dropper wire section	10 mm ²			
Slipping force	3 kN			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.515 kg	0.539 kg	0.566 kg	0.593 kg

	625.152.594	625.153.595	625.154.596	625.155.597
Length a	550 - 850 mm	600 - 1000 mm	750 - 1250 mm	1050 - 1550 mm
Catenary wire diameter	9 - 12.5 mm			
Catenary wire section	50 - 95 mm ²			
Contact wire groove	3.75 - 8.5 mm			
Dropper wire diameter	4.5 mm			
Dropper wire section	10 mm ²			
Slipping force	3 kN			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.496 kg	0.509 kg	0.533 kg	0.56 kg

	625.156.598		625.158.600	
Length a	1350 - 1850 mm		1950 - 2450 mm	
Catenary wire diameter	9 - 12.5 mm			
Catenary wire section	50 - 95 mm ²			
Contact wire groove	3.75 - 8.5 mm			
Dropper wire diameter	4.5 mm			
Dropper wire section	10 mm ²			
Slipping force	3 kN			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.587 kg		0.641 kg	

