


Cable droppers

SHTF4/16V

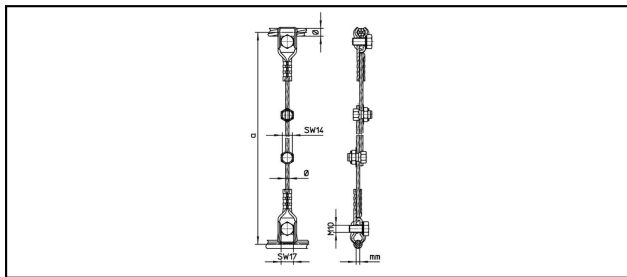

Application

Suspension for contact wire, current feeding

Characteristics










Other lengths and contact wire grooves on request

Material

Clamp CuNiSi / Wire Bz 2

Legend

- 1) Wire provided by customer
- 2) Wire Cu

Article-Nr.									
625.551.000	6.5 - 12.5	25 - 95	3 - 8.5	750 - 1250	6	16	5	0.48	
625.547.000	6.5 - 12.5	25 - 95	3 - 8.5	1050 - 1550	6	16	5	0.492	
625.548.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	6	16	5	0.562	
625.549.000	6.5 - 12.5	25 - 95	3 - 8.5	1650 - 2150	6	16	5	0.614	
625.550.000	6.5 - 12.5	25 - 95	3 - 8.5	1950 - 2450	6	16	5	0.66	
625.608.003	6.5 - 12.5	25 - 95	3 - 8.5	1050 - 1550	6	16	5	0.526	1
625.608.004	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	6	16	5	0.569	1

Technical Specifications: **SHTF4/16V**

	625.551.000	625.547.000	625.548.000	625.549.000
Length a	750 - 1250 mm	1050 - 1550 mm	1350 - 1850 mm	1650 - 2150 mm
Slipping force	5 kN			
Dropper wire diameter	6 mm			
Catenary wire diameter	6.5 - 12.5 mm			
Catenary wire section	25 - 95 mm ²			
Contact wire groove	3 - 8.5 mm			
Dropper wire section	16 mm ²			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.48 kg	0.492 kg	0.562 kg	0.614 kg

	625.550.000	625.608.003	625.608.004
Length a	1950 - 2450 mm	1050 - 1550 mm	1350 - 1850 mm
Slipping force	5 kN		
Dropper wire diameter	6 mm		
Catenary wire diameter	6.5 - 12.5 mm		
Catenary wire section	25 - 95 mm ²		
Contact wire groove	3 - 8.5 mm		
Dropper wire section	16 mm ²		
Commercial specification			
Customs number	85359000		
country of origin	CH	undefined	
Logistic specification			
Kilo / piece	0.66 kg	0.526 kg	0.569 kg

