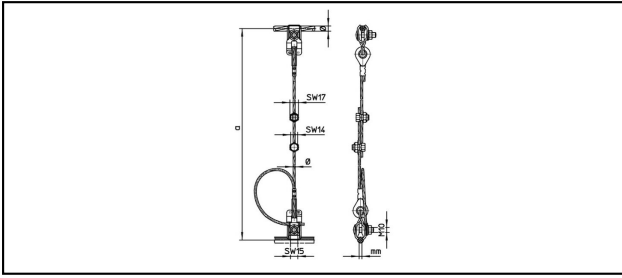


Cable droppers

■ **SHTF5,1/10V**










Application

Suspension for contact wire, non-current feeding

Material

Clamp CuNiSi / Inox / Cable Bz 2 / Thimble plastics

Article-Nr.									
	mm Ø		mm	mm Ø	mm ²	kN	mm a		
625.590.201	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.203	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.204	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		

Technical Specifications: **SHTF5,1/10V**

	625.590.201	625.590.203	625.590.204
Catenary wire diameter	9 - 13 mm		
Catenary wire section	50 - 95 mm ²		
Contact wire groove	5.5 - 7 mm		
Dropper wire diameter	4.5 mm		
Dropper wire section	10 mm ²		
Slipping force	3 kN		
Length a	750 - 2300 mm		
Commercial specification			
Customs number	85359000		
country of origin	ZA*	CH	

