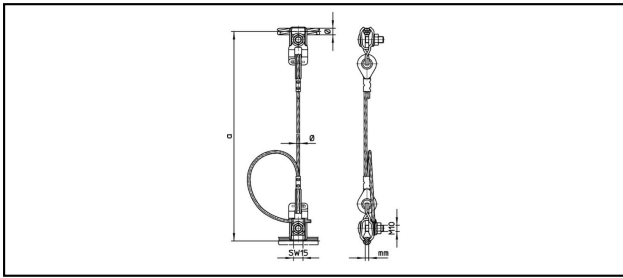


Cable droppers

■ **SHTF5,2/10V**



Application









Suspension for contact wire, non-current feeding

Characteristics

Other length and contact wire groove on request

Material

Clamp CuNiSi / stainless steel / Cable Bz 2 / Thimble plastics

Article-Nr.								
625.590.100	9 - 13	50 - 95	5.5 - 7	4.5	10	3	300 - 2800	0.392

Technical Specifications: **SHTF5,2/10V**

	625.590.100
Catenary wire diameter	9 - 13 mm
Catenary wire section	50 - 95 mm ²
Contact wire groove	5.5 - 7 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	3 kN
Length a	300 - 2800 mm
Commercial specification	
Customs number	0
country of origin	undefined
Logistic specification	
Kilo / piece	0.392 kg

