








Conductor connections and junctions

■ AV 3 Cable lug

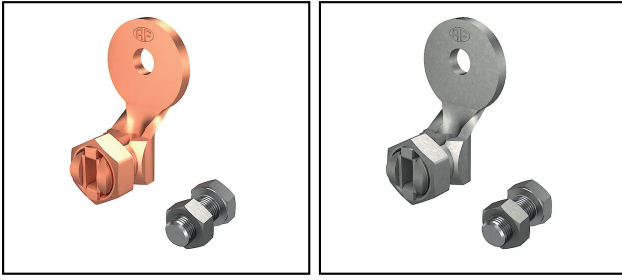

Characteristics

For connectors to constructional element.
Material thickness greater than 1mm.

Article-Nr.	E-Number									
275.030.553	156 831 320	H	Cu	M8x16	6	10 - 25				50

Technical Specifications: **Cable lug AV 3**

Article No.	275.030.553
Approved class H / N (EN 62561-1)	H
Material	Cu
Screw	M8x16
Wire diameter	6 mm
Nominal cross section conductor	10 - 25 mm ²
Type of connector	Access-clip
Type of fastening screws	Hexagon screw
Mounting hole	8 mm
Surface protection	unbehandelt
Suitable for diameter round conductor	6 mm
required torque	12 N·m
Commercial specification	
Customs number	85389000
country of origin	CH
Logistic specification	
VPE Weight	4.12 kg

