








Conductor connections and junctions

■ AV 3 Cable lug

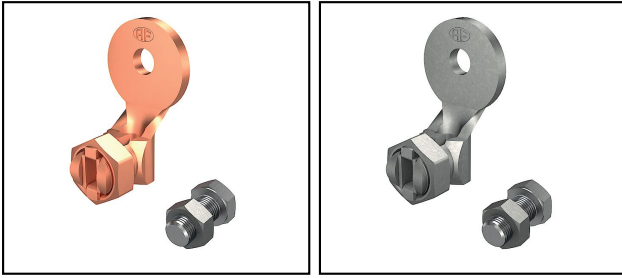

Characteristics

For connectors to constructional element.
Material thickness greater than 1mm.

Article-Nr.	E-Number									
275.031.527	156 831 310	H	CuvSn	M10x20	8	25 - 50				25

Technical Specifications: **Cable lug AV 3**

Article No.	275.031.527
Approved class H / N (EN 62561-1)	H
Material	CuvSn
Screw	M10x20
Wire diameter	8 mm
Nominal cross section conductor	25 - 50 mm ²
Type of connector	Access-clip
Type of fastening screws	Hexagon screw
Mounting hole	10 mm
Surface protection	Galvanic tinned
Suitable for diameter round conductor	9 mm
required torque	25 N·m
Commercial specification	
Customs number	85389000
country of origin	CH
Logistic specification	
VPE Weight	3.625 kg

