

Messenger wire and contact wire insulators

■ TSI019



Application

Catenary insulator


Characteristics




SML: 100 kN

Nominal working tensile load 40 kN

Material

Stainless steel, fiberglass rod PTFE coated

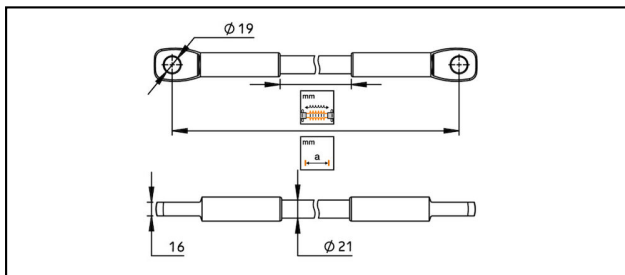

Article-Nr.	mm 	mm 							Kg 
657.025.728	2250	2000							2.5
657.023.724	2750	2500							2.9

Technical Specifications: **TSIO19**

	657.025.728	657.023.724
Length a	2250 mm	2750 mm
Creeping distance	2000 mm	2500 mm
Specified mechanical load (SML)	100 kN	
Commercial specification		
Customs number	85353000	
country of origin	CH	ZA*
Logistic specification		
Kilo / piece	2.5 kg	2.9 kg

