


Messenger wire and contact wire insulators

TSIO20.25

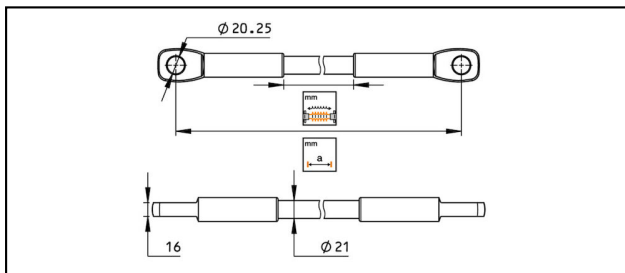

Application

Catenary insulator




Characteristics

SML: 100 kN

Nominal working tensile load 40 kN

Material

Stainless steel, fiberglass rod PTFE coated

Article-Nr.	mm 	mm 								Kg 
657.015.715	1050	800								1.6
657.011.716	1350	1100								1.8
657.010.725	1750	1500								2.1
657.016.728	2250	2000								2.5
657.007.724	2750	2500								2.9

Technical Specifications: **TSIO20.25**

	657.015.715	657.011.716	657.010.725	657.016.728
Length a	1050 mm	1350 mm	1750 mm	2250 mm
Creeping distance	800 mm	1100 mm	1500 mm	2000 mm
Specified mechanical load (SML)	100 kN			
Commercial specification				
Customs number	85353000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.6 kg	1.8 kg	2.1 kg	2.5 kg

	657.007.724
Length a	2750 mm
Creeping distance	2500 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	2.9 kg

