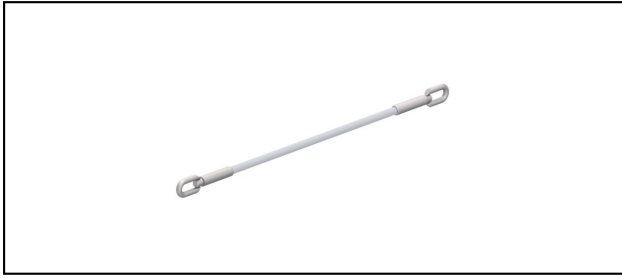


Messenger wire and contact wire insulators


■ TSIL Catenary insulators







Application
Catenary insulator

Characteristics
SML: 100 kN
Nominal working tensile load 40 kN

Material
Stainless steel, fiberglass rod PTFE coated

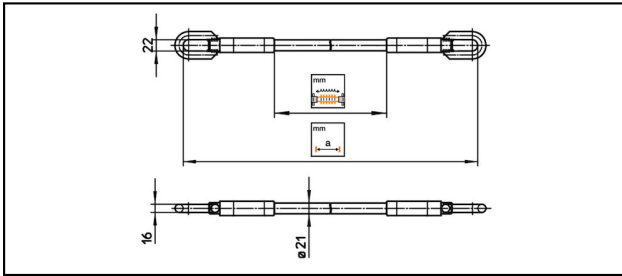

Article-Nr.	mm 	mm 	mm 							Kg 
657.002.714	992	600	960							1.4

Technical Specifications: **Catenary insulators TSIL**

Article No.	657.002.714
Length a	992 mm
Creeping distance	600 mm
Length between suspension	960 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	1.4 kg

