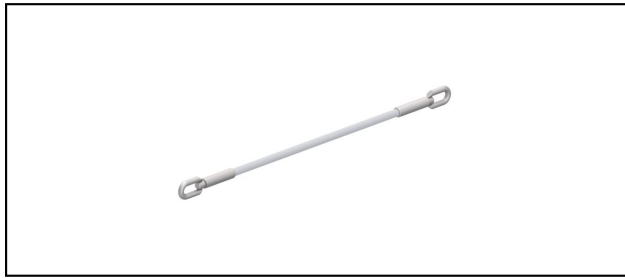


Messenger wire and contact wire insulators


■ TSIL Catenary insulators







Application
Catenary insulator

Characteristics
SML: 100 kN
Nominal working tensile load 40 kN

Material
Stainless steel, fiberglass rod PTFE coated

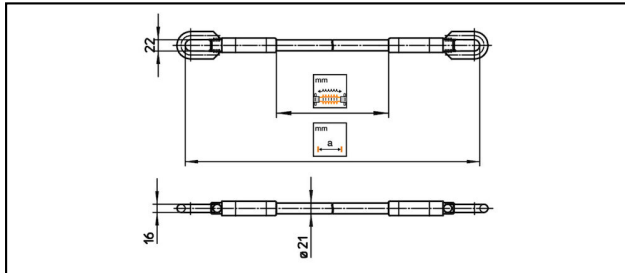

Article-Nr.	mm 	mm 	mm 						Kg 
657.003.715	1192	800	1160						1.6

Technical Specifications: **Catenary insulators TSIL**

Article No.	657.003.715
Length a	1192 mm
Creeping distance	800 mm
Length between suspension	1160 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	1.6 kg

