

Messenger wire and contact wire insulators


■ TSI017 Catenary insulators






Application
Catenary insulator

Characteristics
SML: 100 kN
Nominal working tensile load 40 kN

Material
Stainless steel, fiberglass rod PTFE coated

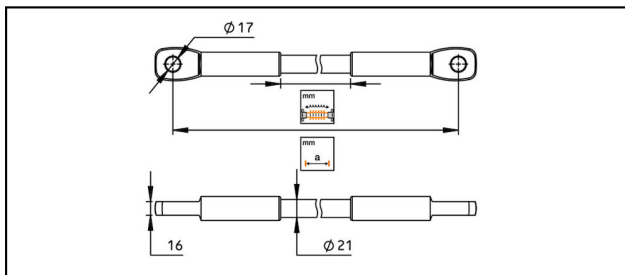

Article-Nr.	mm 	mm 								Kg 
657.012.725	1750	1500								2.1

Technical Specifications: **Catenary insulators TSI017**

Article No.	657.012.725
Length a	1750 mm
Creeping distance	1500 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	2.1 kg

