

Messenger wire and contact wire insulators


■ TSIO19 Catenary insulators




Application
Catenary insulator

Characteristics
SML: 100 kN
Nominal working tensile load 40 kN

Material
Stainless steel, fiberglass rod PTFE coated

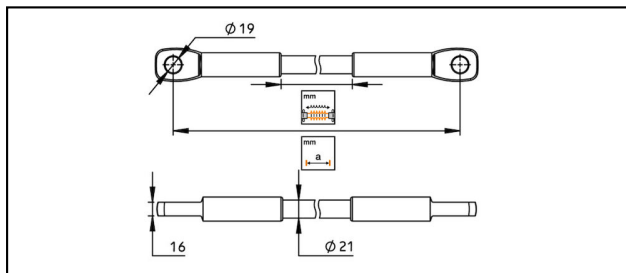

Article-Nr.	mm a	mm a							Kg 
657.025.728	2250	2000							2.5

Technical Specifications: **Catenary insulators TSI019**

Article No.	657.025.728
Length a	2250 mm
Creeping distance	2000 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	2.5 kg

