

Messenger wire and contact wire insulators

■ TSIO20.25 Catenary insulators



Application

Catenary insulator


Characteristics

SML: 100 kN

Nominal working tensile load 40 kN

Material

Stainless steel, fiberglass rod PTFE coated

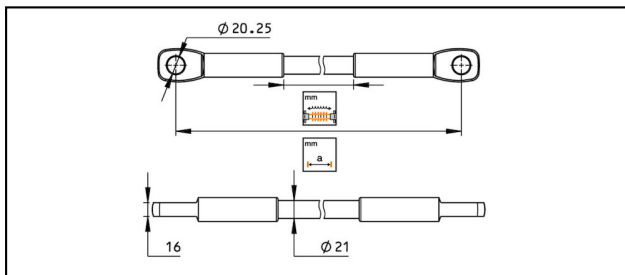

Article-Nr.	mm 	mm 								Kg
657.016.728	2250	2000								2.5

Technical Specifications: **Catenary insulators TSIO20.25**

Article No.	657.016.728
Length a	2250 mm
Creeping distance	2000 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	2.5 kg

