

Messenger wire and contact wire insulators


■ TSIO20.25 Catenary insulators



Application
Catenary insulator

Characteristics
SML: 100 kN
Nominal working tensile load 40 kN

Material
Stainless steel, fiberglass rod PTFE coated

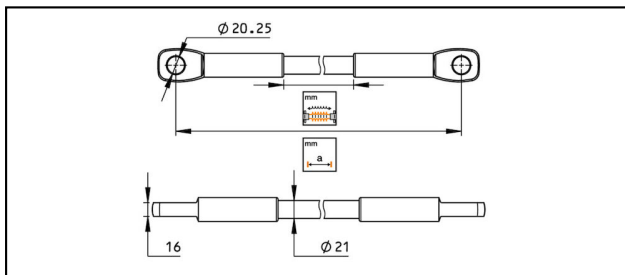

Article-Nr.	mm 	mm 								Kg
657.007.724	2750	2500								2.9

Technical Specifications: **Catenary insulators TSIO20.25**

Article No.	657.007.724
Length a	2750 mm
Creeping distance	2500 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	2.9 kg

