

Messenger wire and contact wire insulators


■ TSIO21.5 Catenary insulators






Application
Catenary insulator

Characteristics
SML: 100 kN
Nominal working tensile load 40 kN

Material
Stainless steel, fiberglass rod PTFE coated

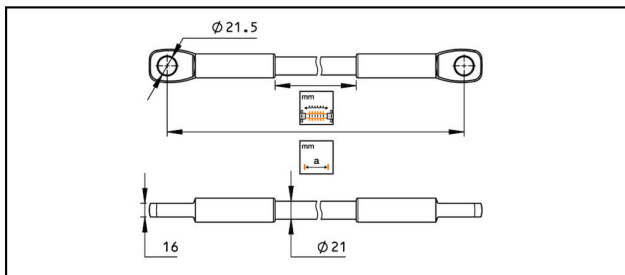

Article-Nr.	mm 	mm 								Kg 
657.032.000	1400	1150								1.85

Technical Specifications: **Catenary insulators TSI021.5**

Article No.	657.032.000
Length a	1400 mm
Creeping distance	1150 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	1.85 kg

