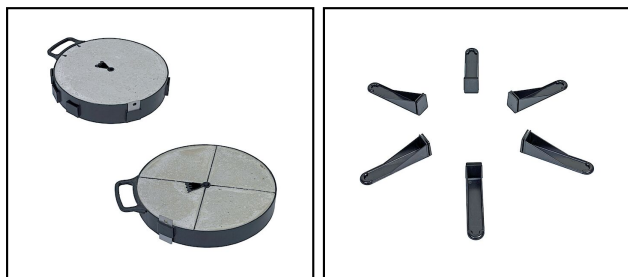









## Air-termination rods

### ■ FL 91 Concrete socket



#### Legend

- a) Concrete socket (Ø = 380mm)
- b) Cantilever (length = 180mm)
- c) Insulated support (1m) including attachments
- c) Trough boring

Article-Nr.	E-Number									
276.010.004	156 952 110	Beton	16		10				a)	1
276.010.005	156 952 120	Beton	16		15				a)	1
276.010.020	156 953 910	Beton		M18	10				a)	1
276.010.021	156 953 920	Beton		M18	15				a)	1
276.010.030	156 953 930	Beton	16		10				a)+c)	1
276.010.031	156 953 940	Beton	16		15				a)+c)	1
276.010.033	156 953 950	Beton	21		10				a)+c)	1
276.010.034	156 953 960	Beton	21		15				a)+c)	1
277.010.002	156 953 970	PVC			10	6			b)	1
277.010.003	156 953 980	PVC			10	4			b)	1

Technical Specifications: **Concrete socket FL 91**

	276.010.004	276.010.005	276.010.020	276.010.021
<b>Material</b>	Beton			
<b>Diameter</b>	335 mm	355 mm		
<b>Eyelet diameter</b>	16 mm			
<b>Internal thread</b>			M18	
<b>Socket weight</b>	10 kg	15 kg	10 kg	15 kg
<b>Number of Cantilever</b>				
<b>Surface protection</b>				
<b>Lightning conductor insertion</b>	Gore		Thread	
<b>Model</b>	Base			
<b>Type of accessory</b>				
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CE*			
<b>Logistic specification</b>				
<b>VPE Weight</b>	10 kg	15 kg	10 kg	15 kg

	276.010.030	276.010.031	276.010.033	276.010.034
<b>Material</b>	Beton			
<b>Diameter</b>	355 mm			
<b>Eyelet diameter</b>	16 mm		21 mm	
<b>Internal thread</b>				
<b>Socket weight</b>	10 kg	15 kg	10 kg	15 kg
<b>Number of Cantilever</b>				
<b>Surface protection</b>				
<b>Lightning conductor insertion</b>	Gore			
<b>Model</b>	Base			
<b>Type of accessory</b>				
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CE*		ZA*	
<b>Logistic specification</b>				
<b>VPE Weight</b>	10 kg	15 kg	10 kg	15 kg

	277.010.002		277.010.003	
<b>Material</b>	PVC			
<b>Diameter</b>				
<b>Eyelet diameter</b>				
<b>Internal thread</b>				
<b>Socket weight</b>	10 kg			
<b>Number of Cantilever</b>	6		4	
<b>Surface protection</b>	unbehandelt			
<b>Lightning conductor insertion</b>				
<b>Model</b>				
<b>Type of accessory</b>	Montagematerial			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CE*			
<b>Logistic specification</b>				
<b>VPE Weight</b>	0.4 kg		0.27 kg	

