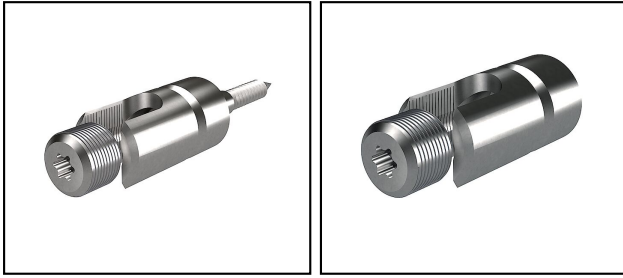










## Fixing elements

## ■ AV 20 Conductor clip for wire



## Legend

a) Facade distance 30mm

Article-Nr.	E-Number									
245.027.011	156 811 010	CuvNi	6 - 8	D. 5x40	14					20
245.028.012	156 811 020	CuvNi	6 - 8	D. 5x70	14					20
245.036.000	156 813 010	CuvNi	6 - 8	D. 5x40	14				a)	20
245.010.011	156 812 000	CuvNi	6 - 9.5	D. 5x40	18					20
245.030.017	156 811 100	CuvNi	6 - 8		14		5.2			20
245.009.018	156 812 100	CuvNi	6 - 9.5		18		6.5			20
245.031.305	156 811 200	CuvNi	6 - 8		14	M6				20
245.032.306	156 811 210	CuvNi	6 - 8		14	M8				20
245.024.305	156 812 200	CuvNi	6 - 9.5		18	M6				20
245.025.306	156 812 210	CuvNi	6 - 9.5		18	M8				20
245.026.307	156 812 220	CuvNi	6 - 9.5		18	M12				20
242.007.011	156 812 503	Al	6 - 10	D. 5x40	20					20

Technical Specifications: **Conductor clip for wire AV 20**

	245.027.011	245.028.012	245.036.000	245.010.011
<b>Material</b>	CuvNi			
<b>Wire diameter</b>	6 - 8 mm			6 - 9.5 mm
<b>Screw</b>	D. 5x40	D. 5x70	D. 5x40	
<b>External diameter</b>	14 mm			18 mm
<b>Internal thread</b>				
<b>Eyelet diameter</b>				
<b>Wall distance</b>	10 mm		30 mm	10 mm
<b>Mounting type conductor</b>	With screw clamp			
<b>Mounting type holder</b>	Bore hole			
<b>Material of holder</b>	Copper			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CH			
<b>Logistic specification</b>				
<b>VPE Weight</b>	0.555 kg	0.62 kg	0.89 kg	0.895 kg

	245.030.017	245.009.018	245.031.305	245.032.306
<b>Material</b>	CuvNi			
<b>Wire diameter</b>	6 - 8 mm	6 - 9.5 mm	6 - 8 mm	
<b>Screw</b>				
<b>External diameter</b>	14 mm	18 mm	14 mm	
<b>Internal thread</b>			M6	M8
<b>Eyelet diameter</b>	5.2 mm	6.5 mm		
<b>Wall distance</b>	10 mm			
<b>Mounting type conductor</b>	With screw clamp			
<b>Mounting type holder</b>	Bore hole		Bore hole with M thread	
<b>Material of holder</b>	Copper			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CH			
<b>Logistic specification</b>				
<b>VPE Weight</b>	0.46 kg	0.794 kg	0.505 kg	0.47 kg

	245.024.305	245.025.306	245.026.307	242.007.011
<b>Material</b>	CuvNi			Al
<b>Wire diameter</b>	6 - 9.5 mm			6 - 10 mm
<b>Screw</b>				D. 5x40
<b>External diameter</b>	18 mm			20 mm
<b>Internal thread</b>	M6	M8	M12	
<b>Eyelet diameter</b>				
<b>Wall distance</b>	10 mm			
<b>Mounting type conductor</b>	With screw clamp			
<b>Mounting type holder</b>	Bore hole with M thread			Bore hole
<b>Material of holder</b>	Copper			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CH			
<b>Logistic specification</b>				
<b>VPE Weight</b>	0.863 kg	0.824 kg	0.86 kg	1.103 kg

