
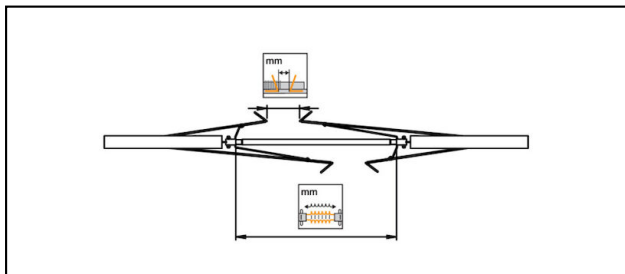
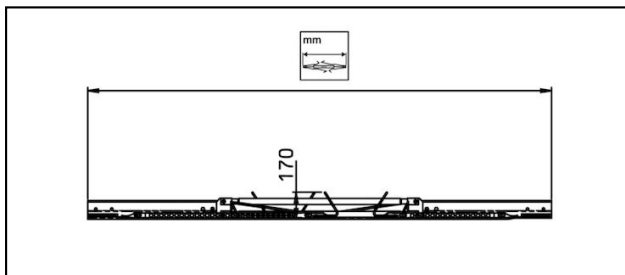


Conductor rail section insulators

CRZS25

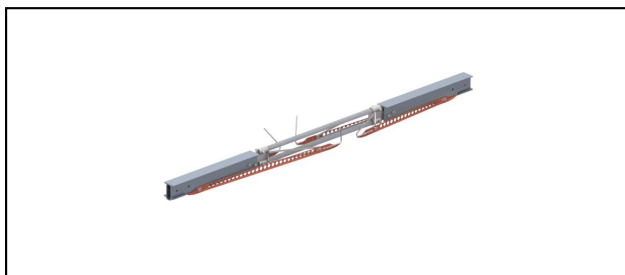

Application

Conductor rail section insulator up to 25 kV AC.

Characteristics






For max. speed up to 200 km/h

Material

GRP/Silicone rubber, Cu, CuNiSi, stainless steel.

Legend

1) Please contact us for any further information.

Article-Nr.	 mm ²	 mm	 mm	 mm						
655.999.007	80 - 150	1100	220	2900						1

Technical Specifications: **CRZS25**

	655.999.007
Contact wire section	80 - 150 mm ²
Creeping distance	1100 mm
Arcing horn distance	220 mm
Length a	2900 mm
Commercial specification	
Customs number	0
country of origin	ZA*

