


## Conical coupler

### ■ KV156 Cone connector

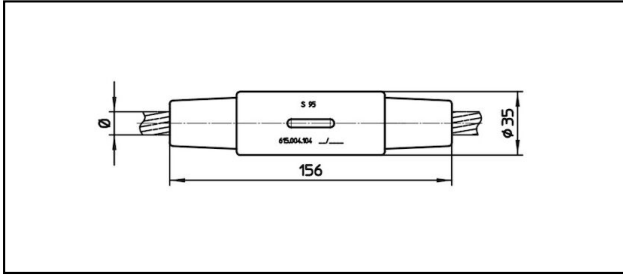

#### Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

#### Characteristics








Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 80 kN

#### Material

Corpus CuNiSi / Collet AIBz resp. stainless steel

#### Legend

- 1) Sealed
- 2) Collet stainless steel
- 3) Colour code

Article-Nr.									
615.022.000	S93.3	12.75	93.3					0.7	2

Technical Specifications: **Cone connector KV156**

Article No.	615.022.000
<b>Rail product name</b>	S93.3
<b>Catenary wire diameter</b>	12.75 mm
<b>Catenary wire section</b>	93.3 mm <sup>2</sup>
<b>comment</b>	2
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Texte	
<b>comment</b>	2
Logistic specification	
<b>Kilo / piece</b>	0.7 kg

