


Conical coupler

■ KV176 Cone connector

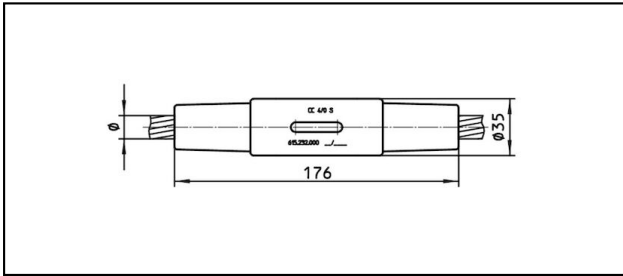

Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics




Service load min. 3 kN / max. 25 kN
Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / collet AlBz

Legend

1) Collet stainless steel

Article-Nr.									
615.226.000	S50 St	9.6	50					0.81	1

Technical Specifications: **Cone connector KV176**

Article No.	615.226.000
Rail product name	S50 St
Catenary wire diameter	9.6 mm
Catenary wire section	50 mm ²
comment	1
Commercial specification	
Customs number	85359000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	0.81 kg

