
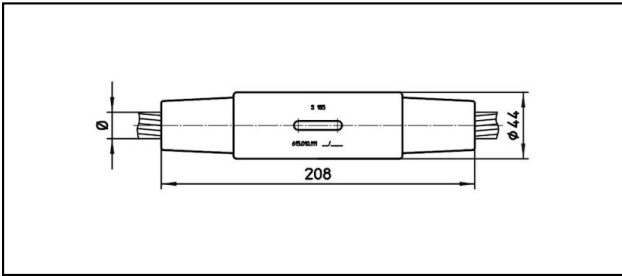


## Conical coupler

### ■ KV208 Cone connector

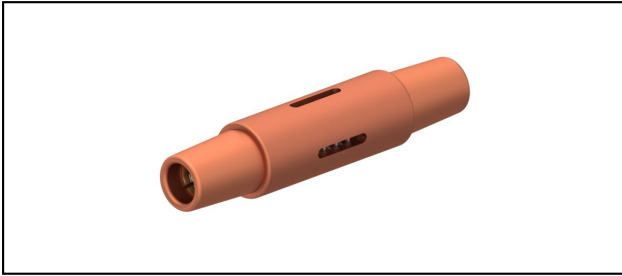

#### Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

#### Characteristics







Service load min. 3 kN / max. 25 kN

#### Material

Corpus CuNiSi / Collet AIBz

#### Legend

1) Colour code

Article-Nr.									
615.209.000	S161	16.75	161	80				1.55	

Technical Specifications: **Cone connector KV208**

Article No.	615.209.000
<b>Rail product name</b>	S161
<b>Catenary wire diameter</b>	16.75 mm
<b>Catenary wire section</b>	161 mm <sup>2</sup>
<b>Minimum breaking load</b>	80
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	1.55 kg

