


Conical coupler

■ RV156 Conical coupling

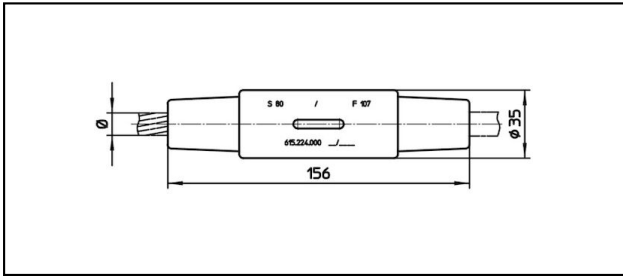

Application

Tensioned and current-proofed Cu, Cu-Steel or Bz cables

Characteristics

Service load min. 3 kN / max. 25 kN








Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AIBz

Legend

1) Sealed

Article-Nr.									
615.023.000	D8/S70	7.9 - 10.75	70	8	50			0.69	

Technical Specifications: **Conical coupling RV156**

Article No.	615.023.000
Rail product name	D8/S70
Catenary wire diameter	7.9 - 10.75 mm
Catenary wire section	70 mm ²
Contact wire diameter	8 mm
Contact wire section	50 mm ²
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.69 kg

