


## Conical coupler

### ■ RV156 Conical coupling

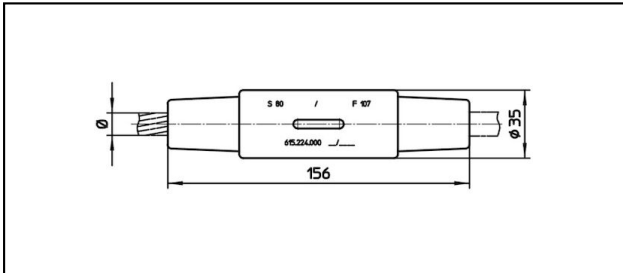

#### Application

Tensioned and current-proofed Cu, Cu-Steel or Bz cables

#### Characteristics

Service load min. 3 kN / max. 25 kN








Breaking load of corpus min. 80 kN

#### Material

Corpus CuNiSi / Collet AIBz

#### Legend

1) Sealed

Article-Nr.									
615.018.000	S95/72	12.8	95	9.6	72			0.69	1

Technical Specifications: **Conical coupling RV156**

Article No.	615.018.000
<b>Rail product name</b>	S95/72
<b>Catenary wire diameter</b>	12.8 mm
<b>Catenary wire section</b>	95 mm <sup>2</sup>
<b>Contact wire diameter</b>	9.6 mm
<b>Contact wire section</b>	72 mm <sup>2</sup>
<b>comment</b>	1
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Texte	
<b>comment</b>	1
Logistic specification	
<b>Kilo / piece</b>	0.69 kg

