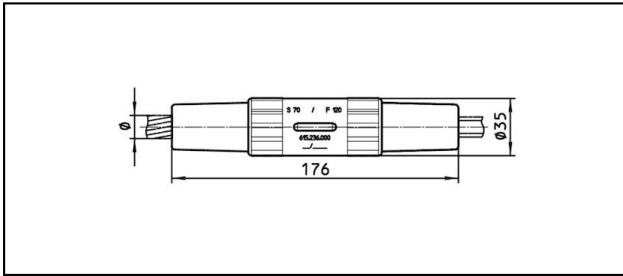


Conical coupler

■ RV176 Conical coupling



Application

Tensioned and current-proofed Cu, Cu-Steel or Bz cables

Characteristics

Service load min. 3 kN / max. 25 kN








Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AIBz

Legend

1) With colour code

Article-Nr.									
615.238.000	S120/FD120	14.5	120	13.8	120			0.8	1

Technical Specifications: **Conical coupling RV176**

Article No.	615.238.000
Rail product name	S120/FD120
Catenary wire diameter	14.5 mm
Catenary wire section	120 mm ²
Contact wire diameter	13.8 mm
Contact wire section	120 mm ²
comment	1
Commercial specification	
Customs number	85359000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	0.8 kg

