
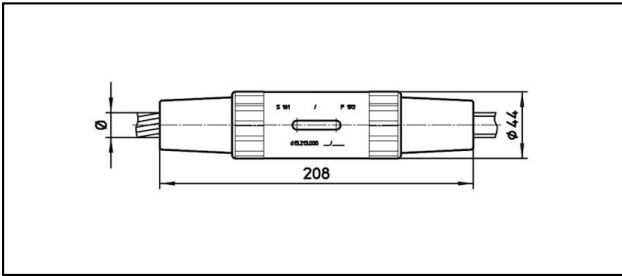


Conical coupler

■ RV208 Conical coupling

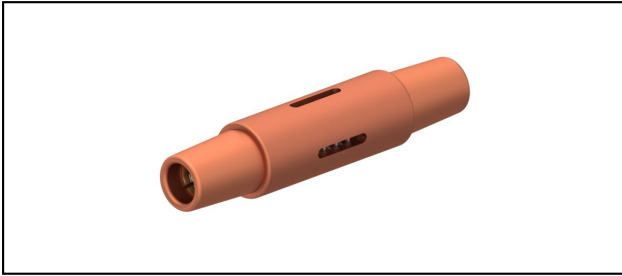

Application

Tensioned and current-proofed Cu, Cu-Steel or Bz cables

Characteristics

Service load min. 3 kN / max. 25 kN








Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AIBz

Legend

1) With colour code

Article-Nr.									
615.213.000	S161/F193	16.75	161	16.75	193			1.35	1

Technical Specifications: **Conical coupling RV208**

Article No.	615.213.000
Rail product name	S161/F193
Catenary wire diameter	16.75 mm
Catenary wire section	161 mm ²
Contact wire diameter	16.75 mm
Contact wire section	193 mm ²
comment	1
Commercial specification	
Customs number	85359000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	1.35 kg

