


Conical coupler

■ RV208 Conical coupling

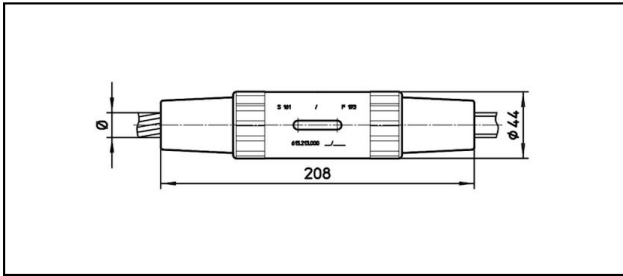

Application

Tensioned and current-proofed Cu, Cu-Steel or Bz cables

Characteristics

Service load min. 3 kN / max. 25 kN








Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AIBz

Legend

1) With colour code

Article-Nr.									
615.237.000	S181/S161	17.5 - 16.8	181 - 161					1.4	

Technical Specifications: **Conical coupling RV208**

Article No.	615.237.000
Rail product name	S181/S161
Catenary wire diameter	17.5 - 16.8 mm
Catenary wire section	181 - 161 mm ²
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	1.4 kg

