


## Conical coupler

### KV208

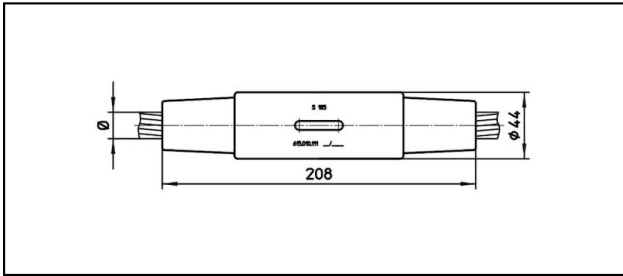

#### Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

#### Characteristics

Service load min. 3 kN / max. 25 kN

#### Material

Corpus CuNiSi / Collet AIBz

#### Legend

1) Colour code

Article-Nr.	«N»	mm Ø	mm	kN ▶▶				Kg	
615.239.000	S240	21	240	100				1.5	
615.239.020	S126	14.5	126	100				1.68	
615.209.000	S161	16.75	161	80				1.55	
615.220.000	S161	16.75	161	80				1.55	1
615.010.111	S185	17.5	185	80				1.55	
615.210.000	S202	18.75	202	80				1.55	
615.214.000	S202	18.75	202	80				1.55	1
615.240.000	S253	21	253	80				1.4	

Technical Specifications: **KV208**

	615.239.000	615.239.020	615.209.000	615.220.000
<b>Rail product name</b>	S240	S126	S161	
<b>Catenary wire diameter</b>	21 mm	14.5 mm	16.75 mm	
<b>Catenary wire section</b>	240 mm <sup>2</sup>	126 mm <sup>2</sup>	161 mm <sup>2</sup>	
<b>Minimum breaking load</b>	100 kN		80 kN	
Commercial specification				
<b>Customs number</b>	85359000			
<b>country of origin</b>	CH			
Logistic specification				
<b>Kilo / piece</b>	1.5 kg	1.68 kg	1.55 kg	

	615.010.111	615.210.000	615.214.000	615.240.000
<b>Rail product name</b>	S185	S202	S253	
<b>Catenary wire diameter</b>	17.5 mm	18.75 mm	21 mm	
<b>Catenary wire section</b>	185 mm <sup>2</sup>	202 mm <sup>2</sup>	253 mm <sup>2</sup>	
<b>Minimum breaking load</b>	80 kN			
Commercial specification				
<b>Customs number</b>	85359000			
<b>country of origin</b>	CH			
Logistic specification				
<b>Kilo / piece</b>	1.55 kg			1.4 kg

