










Conductor connections and junctions

■ AV 25 Connecting lug

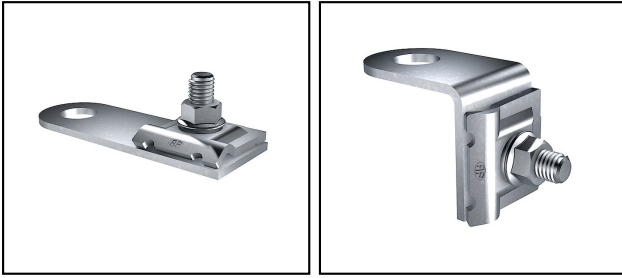

Legend

a) for isolated fall protection, side length to middle hole 70mm

Article-Nr.	E-Number									
270.055.006	156 801 500	H	InoxA2	M8x30	6 - 10	13	90		a)	25

Technical Specifications: **Connecting lug AV 25**

Article No.	270.055.006
Approved class H / N (EN 62561-1)	H
Material	InoxA2
Wire diameter	6 - 10 mm
Eyelet diameter	13 mm
Screw	M8x30
Deflection (angle)	90 °
Type of connector	Access-clip
Type of fastening screws	Hexagon screw
Surface protection	unbehandelt
required torque	12 N-m
comment	a)
Commercial specification	
Customs number	85389040
country of origin	CH
Texte	
comment	a)
Logistic specification	
VPE Weight	3.75 kg