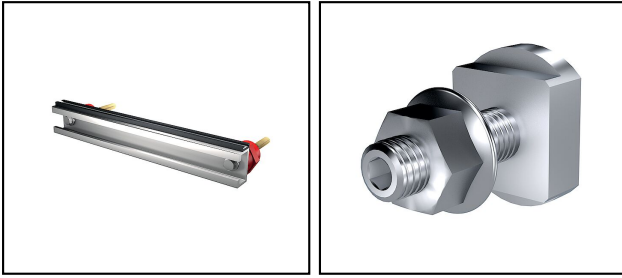


Equipotential profile variable

■ PA 30 Connection screw

**Characteristics**

Including pin insulators-sets (halogen and silicone-free)

The terminal screws must be ordered separately









The number of connections may vary depending on the width of the connected cable lugs.

Legend

a) Connection bolt M8

b) Connection bolt M10

c) Connection bolt M12

Article-Nr.	E-Number									
266.050.002	156 903 670	InoxA4		M10x35					b)	25

Technical Specifications: **Connection screw PA 30**

Article No.	266.050.002
Material	InoxA4
Screw	M10x35
comment	b)
Commercial specification	
Customs number	85389000
country of origin	CH
Texte	
comment	b)
Logistic specification	
VPE Weight	1.2 kg

