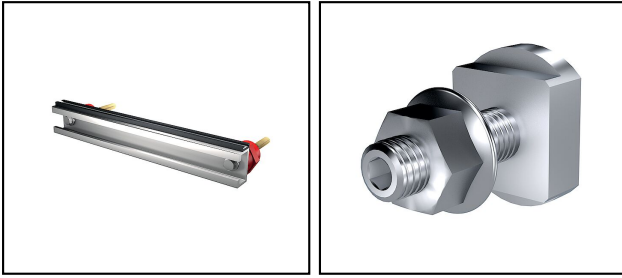


Equipotential profile variable

■ PA 30 Connection screw

**Characteristics**

Including pin insulators-sets (halogen and silicone-free)

The terminal screws must be ordered separately









The number of connections may vary depending on the width of the connected cable lugs.

Legend

a) Connection bolt M8

b) Connection bolt M10

c) Connection bolt M12

| Article-Nr. | E-Number |  |  |  |  |  |  | |  |  |
|-------------|-------------|---|---|---|---|---|---|--|---|---|
| 266.050.003 | 156 990 170 | InoxA4 | | M12x35 | | | | | c) | 25 |

Technical Specifications: **Connection screw PA 30**

| | |
|--------------------------|-------------|
| Article No. | 266.050.003 |
| Material | InoxA4 |
| Screw | M12x35 |
| comment | c) |
| Commercial specification | |
| Customs number | 85389000 |
| country of origin | CH |
| Texte | |
| comment | c) |
| Logistic specification | |
| VPE Weight | 1.51 kg |

