


## Foundation earthing components

### ■ FE 64 Connection set Vario

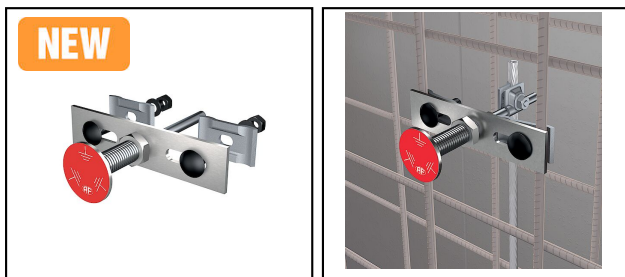

#### Application

- Electrical discharge of the short-circuit possible via 1 reinforcing bar with Ø10mm or separate earthing conductor.
- Pretensioning of 15mm against formwork necessary.

#### Characteristics

- Connection set Vario for variable installation in all installation positions.
  - Fastening without nails.
  - Stepless adjustment possible via the thread.
  - Clean connection after striking due to new adhesive.
- Pretensioning of 15mm against formwork necessary.  
Electrical discharge of the short-circuit possible via 1 reinforcing bar with Ø10mm or separate earthing conductor.

#### Content

- 1 Connection part
- 1 Mounting bracket
- 2 connection plates
- 1 Connection part (type FE 27)
- 1 Around cross clamp (type FE 45)
- 3 Clout nails made of stainless steel

Article-Nr.	E-Number	kA/s	Material	Thread	mm					
261.051.000	156 940 730	6	InoxA4	M10x25	6 - 22					1

Technical Specifications: **Connection set Vario FE 64**

Article No.	261.051.000
Short circuit current	6 kA/1s
Material	InoxA4
Screw	M10x25
Clamping range round	6 - 22 mm
Diameter connection plate	50 mm
Connecting shaft	10 mm
Material connection lug	rostfreier Stahl (V4A)
Length	180 mm
Bolt dimension metric	10
Commercial specification	
Customs number	85389030
country of origin	CH
Logistic specification	
VPE Weight	6.81 kg

