










## Conductor connections and junctions

### ■ AV 24 Connector for profile rails

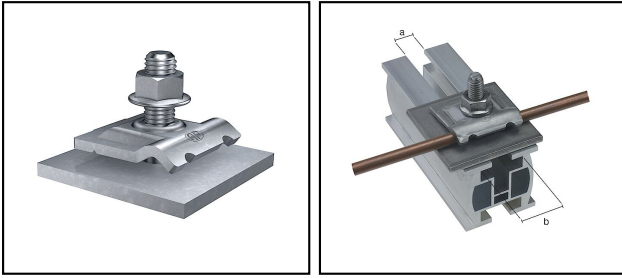

#### Characteristics

With hammer head screws for profile rails.

Article-Nr.	E-Number								
260.062.053	156 831 480	H	InoxA2	M8x40	10 - 12	95	20	35	50

Technical Specifications: **Connector for profile rails AV 24**

Article No.	260.062.053
Approved class H / N (EN 62561-1)	H
Material	InoxA2
Screw	M8x40
Wire diameter	10 - 12 mm
Nominal cross section conductor	95 mm <sup>2</sup>
Type of connector	Connection clamp
Type of fastening screws	Hexagon screw
Suitable for connection	Round conductor Rd 10-12 / Rd 10-12
Surface protection	unbehandelt
Length a	20 mm
Width b	35 mm
required torque	12 N·m
Commercial specification	
Customs number	85389000
country of origin	CH
Logistic specification	
VPE Weight	8.5 kg