










## Conductor connections and junctions

### ■ AV 48 Contact connector Universal

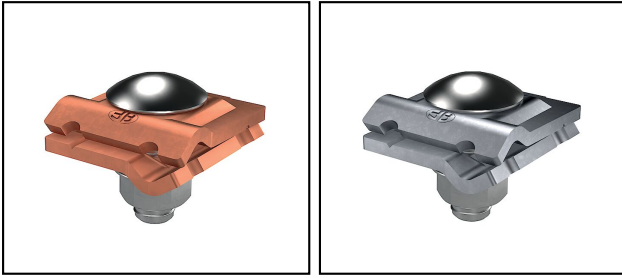

#### Legend

- a) For crossings use max. conductor  $\varnothing$  8mm
- b) For crossings use max. conductor  $\varnothing$  10mm

Article-Nr.	E-Number									
270.000.003	156 831 158	H	ok	InoxA4	M10x40	8 - 12	1 - 3		b)	50

Technical Specifications: **Contact connector Universal AV 48**

Article No.	270.000.003
Approved class H / N (EN 62561-1)	H
Suitable for use in soil	ok
Material	InoxA4
Screw	M10x40
Wire diameter	8 - 12 mm
Clamping range flat	1 - 3 mm
Surface protection	unbehandelt
Type of fastening screws	Hexagon screw
Suitable for connection	Rundleiter Rd 8-10/Flachleiter Fl 30
Type of connector	Multi purpose connecting clamp
required torque	25 N·m
<b>comment</b>	b)
Commercial specification	
Customs number	85389000
country of origin	CH
Texte	
<b>comment</b>	b)
Logistic specification	
VPE Weight	6.055 kg

