
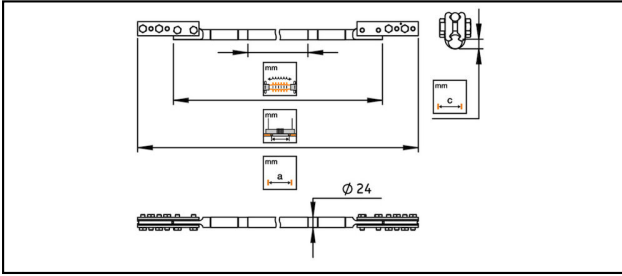


Messenger wire and contact wire insulators

FDI Contact wire insulators

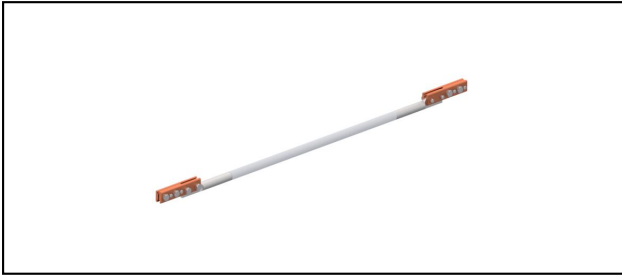

Application

Contact wire insulator

Characteristics

SML: ≥ 80 kN

Min. breaking load: 80 kN

Material

Stainless steel, CuNiSi, GRP rod PTFE coated

Legend

1) EN 50 149

2) ASTH B-9 / ASTH B-47

Article-Nr.	mm \emptyset	mm ²	mm	mm	mm	mm	mm	Kg	
655.258.000	350MCM	177.3	6.78	816	11.84	300	646	2.2	2

Technical Specifications: **Contact wire insulators FDI**

Article No.	655.258.000
Specified mechanical load (SML)	80 kN
Contact wire diameter	350MCM
Contact wire section	177.3 mm ²
Contact wire groove	6.78 mm
Length a	816 mm
Height c	11.84 mm
Creeping distance	300 mm
Length between contact wire	646 mm
comment	2
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	2
Logistic specification	
Kilo / piece	2.2 kg

