
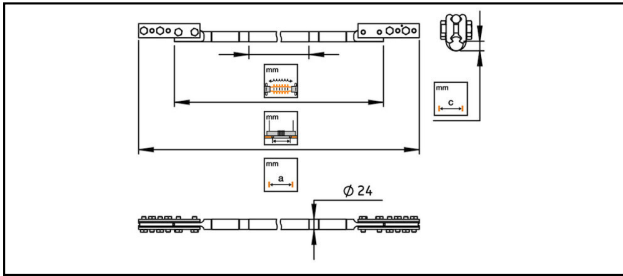


Messenger wire and contact wire insulators

FDI Contact wire insulators

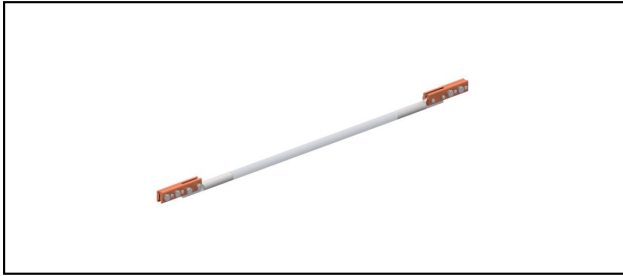

Application

Contact wire insulator

Characteristics

SML: ≥ 80 kN

Min. breaking load: 80 kN

Material

Stainless steel, CuNiSi, GRP rod PTFE coated

Legend

1) EN 50 149

2) ASTH B-9 / ASTH B-47

Article-Nr.	mm Ø	mm ²	mm	mm	mm	mm	mm	Kg	
655.245.000	BC/300MCM	150	6.92	1116	10.5	600	946	2.5	1, 2

Technical Specifications: **Contact wire insulators FDI**

Article No.	655.245.000
Specified mechanical load (SML)	80 kN
Contact wire diameter	BC/300MCM
Contact wire section	150 mm ²
Contact wire groove	6.92 mm
Length a	1116 mm
Height c	10.5 mm
Creeping distance	600 mm
Length between contact wire	946 mm
comment	1, 2
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	1, 2
Logistic specification	
Kilo / piece	2.5 kg

