


Messenger wire and contact wire insulators

FDI Contact wire insulators

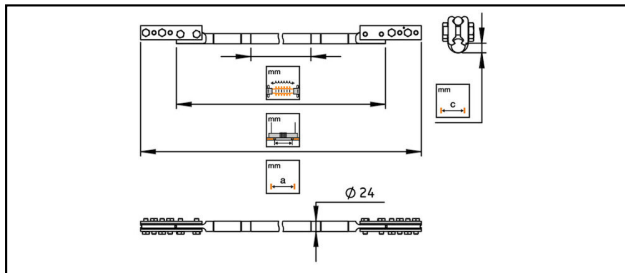

Application

Contact wire insulator

Characteristics

SML: ≥ 80 kN

Min. breaking load: 80 kN

Material

Stainless steel, CuNiSi, GRP rod PTFE coated

Legend

1) EN 50 149

2) ASTH B-9 / ASTH B-47

Article-Nr.	mm Ø	mm ²	mm	mm	mm	mm	mm	Kg	
655.255.000	BC/300MCM	107	6.92	1433	7.81	955	1301	2.7	1

Technical Specifications: **Contact wire insulators FDI**

Article No.	655.255.000
Specified mechanical load (SML)	80 kN
Contact wire diameter	BC/300MCM
Contact wire section	107 mm ²
Contact wire groove	6.92 mm
Length a	1433 mm
Height c	7.81 mm
Creeping distance	955 mm
Length between contact wire	1301 mm
comment	1
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	2.7 kg

