


Messenger wire and contact wire insulators

■ **FDIS** Contact wire insulators

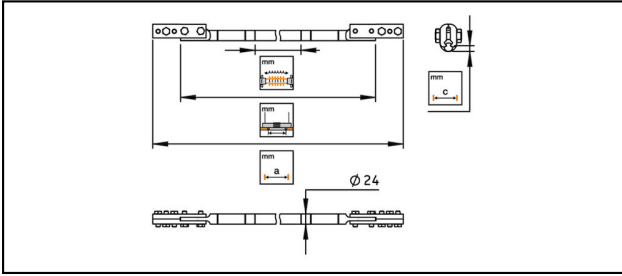

Application

Contact wire insulator

Characteristics

SML of insulator: 80 kN

Min. breaking load: 60kN

Material

Stainless steel, CuNiSi, GRP rod PTFE coated

Legend

1) EN 50 149

2) ED 171

3) BS 23

Article-Nr.	mm Ø	mm ²	mm	mm	mm	mm	mm	Kg	
655.250.000	AC-100	100	5.6	1276	8	800	1146	2.7	1

Technical Specifications: **Contact wire insulators FDIS**

Article No.	655.250.000
Specified mechanical load (SML)	80 kN
Contact wire diameter	AC-100
Contact wire section	100 mm ²
Contact wire groove	5.6 mm
Length a	1276 mm
Height c	8 mm
Creeping distance	800 mm
Length between contact wire	1146 mm
comment	1
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	2.7 kg