


Messenger wire and contact wire insulators

■ **FDIS** Contact wire insulators

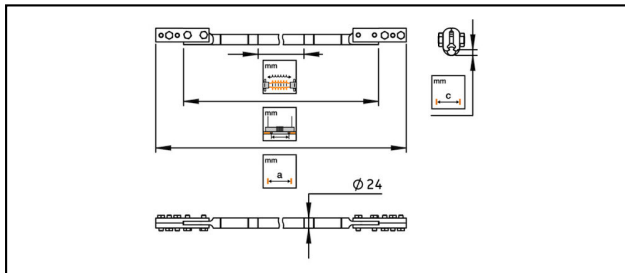

Application

Contact wire insulator

Characteristics

SML of insulator: 80 kN

Min. breaking load: 60kN

Material

Stainless steel, CuNiSi, GRP rod PTFE coated

Legend

1) EN 50 149

2) ED 171

3) BS 23

Article-Nr.	mm \varnothing	mm ²	mm	mm	mm	mm	mm	Kg	
655.237.000	BS-23	107	5.52	1880	8.8	1404	1750	3.3	3

Technical Specifications: **Contact wire insulators FDIS**

Article No.	655.237.000
Specified mechanical load (SML)	80 kN
Contact wire diameter	BS-23
Contact wire section	107 mm ²
Contact wire groove	5.52 mm
Length a	1880 mm
Height c	8.8 mm
Creeping distance	1404 mm
Length between contact wire	1750 mm
comment	3
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	3
Logistic specification	
Kilo / piece	3.3 kg