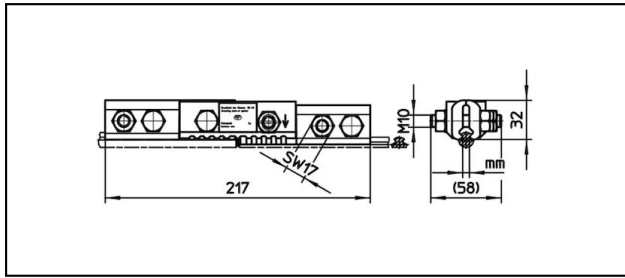


Splice fittings

■ **SKR217** Adjustable contact wire splice fitting



Application

Contact wire splice fitting adjustable for copper or copper alloy contact wire

Characteristics







Torque 50 Nm

Material

Clamping plates CuNiSi

Legend

- 1) With suspension lug
- 2) Special high tensile CuNiSi

Article-Nr.	 mm ²	 mm ²	 mm ²	 mm				 Kg	
635.166.001	- 150	- 150	- 150	8.5				1.5	2

Technical Specifications: **Adjustable contact wire splice fitting SKR217**

Article No.	635.166.001
Starting torque	50 N·m
Contact wire section Cu	- 150 mm ²
Contact wire section CuMg 0.2	- 150 mm ²
Contact wire section CuAg	- 150 mm ²
Contact wire groove	8.5 mm
comment	2
Commercial specification	
Customs number	85359000
country of origin	CH
Texte	
comment	2
Logistic specification	
Kilo / piece	1.5 kg

