


Splice fittings

■ **SKR169** Adjustable contact wire splice fitting

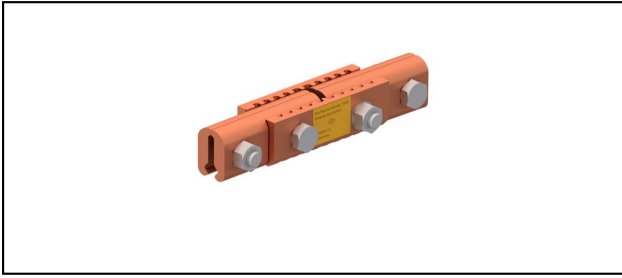

**Application**


Contact wire splice fitting adjustable for copper or copper alloy contact wire






**Characteristics**

Torque 50 Nm

**Material**

Clamping plates CuNiSi

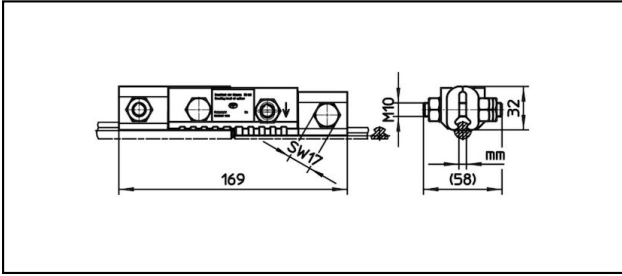

Article-Nr.									
635.024.000	- 150	- 107	- 120	5.6 - 6.9					1.07

Technical Specifications: **Adjustable contact wire splice fitting SKR169**

Article No.	635.024.000
Starting torque	50 N·m
Contact wire section Cu	- 150 mm <sup>2</sup>
Contact wire section CuMg 0.2	- 107 mm <sup>2</sup>
Contact wire section CuAg	- 120 mm <sup>2</sup>
Contact wire groove	5.6 - 6.9 mm
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	1.07 kg

